

Series FP-900 Ambient Temperature Dispensing Guns



Ergonomic guns provide operating ease and pattern flexibility for flat panel gluing applications.



Nordson® FP-900 guns minimize physical stress and fatigue when manually applying ambient temperature adhesives to horizontal and/or vertical components. Weight-supported design and ergonomic configuration allow operator to maintain neutral wrist position.

FP-900 guns are ideal for gluing applications on flat panels in the automotive, appliance and furniture industries. The complete flat-panel gun system includes an FP-900 swirl gun, hose and suspension package.

Ergonomic design promotes operator comfort to help increase productivity.

- **Durable suspension package** bears the gun's weight and permits a wide range of horizontal movement.
- **Pivoting swing arm** moves easily left or right and in or out relative to the operator's position.
- **Patented multi-plane swivel** allows 360-degree gun rotation and up to 20-degree angle movement from centerline, reducing wrist stress.
- **Adjustable trigger handle** allows left- or right-hand operation, and auxiliary guide handle permits two-handed use for added control.

- **Light-touch trigger** activates a microswitch in gun handle, providing instant adhesive flow.

- **Thumb safety switch** locks trigger to prevent accidental dispensing.


Design enhances pattern and production robustness.

- **Selection of nozzle** provides swirl spray width range to meet deposition requirements.
- **Purge ports** for easy material flush.
- **External mix design** maintains positive separation of adhesive and process spray air to maximize swirl pattern robustness.
- **Design optimized** to process today's high-performance ambient temperature, moisture-cure materials.

Series FP-900 Ambient Temperature Dispensing Guns



The FP-900 system provides a weight-supported design and ergonomic configuration that help reduce worker fatigue and physical stress.

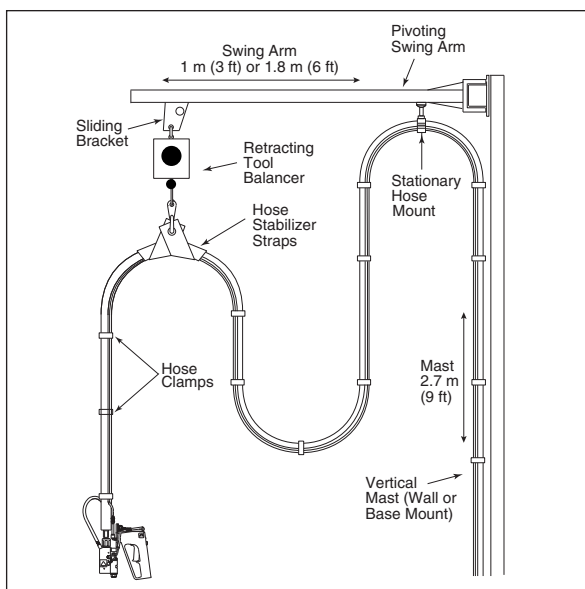

FP-900 Gun System

Specifications

Pattern Type¹	Wide swirl or random fibers
Operating Temperature	Ambient
Maximum Input Hydraulic Pressure	207 bar (3000 psi)
Material Viscosity Range	1,000 – 1,000,000 cps
Operating Air Pressure²	4.1 to 6.9 bar (60 to 100 psi)
Air Consumption	6.0 scfm maximum
Nozzle Orifice Diameters³	0.89 mm (0.035 in.) 1.02 mm (0.040 in.) 1.24 mm (0.049 in.) 1.40 mm (0.055 in.)
Spray Pattern Width⁴	25 to 152 mm (1 to 6 in.)
Electrical Service	None

¹ FP-900 guns are compatible with Nordson Rhino® pumps.

² Recommended range. Dry, regulated, unlubricated air required for consistent gun operation. Module performance and durability will be negatively affected if operated outside the recommended range. Volumetric air requirements will vary with gun configuration and application.

³ Order nozzles separately.

⁴ Maximum achievable swirl pattern width depends on adhesive being dispensed.



For more information, talk with your Nordson representative or contact your Nordson regional office.

United States

Duluth, Georgia
Telephone: (800) 683-2314
Toll-free Facsimile:
(866) 667-3329

Canada

Markham, Ontario
Telephone: (800) 463-3200
Facsimile: (905) 475-8821

Europe

Lüneburg, Germany
Telephone: (49) 4131-894-0
Facsimile: (49) 4131-894-149

Japan

Tokyo, Japan
Telephone: (81) 3-5762-2700
Facsimile: (81) 3-5762-2701

Asia/Australia/ Latin America

Amherst, Ohio
Telephone: (440) 985-4797
Facsimile: (440) 985-1096

www.nordson.com



When you expect more.®